


SERIES BNC REVERSE POLARITY RF COAXIAL CONNECTORS

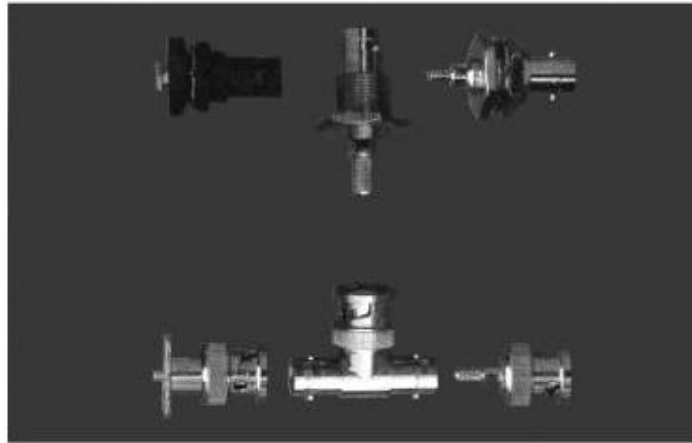

Series BNC inversion of jack and plug RF connectors used in some occasions , such as has strictly differentiated input and output entrance and has special used entrance.

Key performance

Characteristic Impedance : 50 Ω

Frequency range : 0~4GHz

Contact resistance :

Center conductor ≤ 2.0m Ω

Out conductor ≤ 0.2m Ω

Insulation resistance : ≥ 5000M Ω

Insulator voltage withstanding : 1500V

VSWR : ≤ 1.30

Connector durability : 500 cycles

Applicable spec/std : MIL-C-39012

Material

Center contacts:

Male---brass, gold plated.

Female---phosphor bronze, gold plated

Bodies and other metal parts:


brass, nickel plated

Insulators: Teflon

Crimp ferrule: copper, nickel plated.


Gasket and seal rings: silicone rubber

Heat-shrink tubing: thermofit plastic.

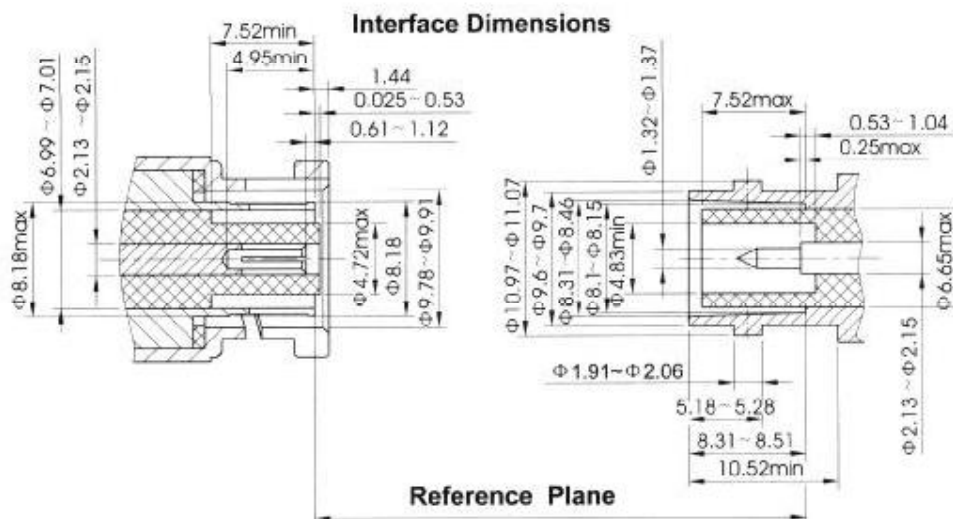


REVERSE POLARITY BNC


CERNEXWAVE




Type	part number	suitable cable	L	D	Note
BNC-FK3Y	8321-6503	3	27	Φ1.6	
BNC-FK5Y	8321-6504	5	27.8	Φ3.1	




Type	part number	suitable cable	L	D	Note
BNC-FKW3Y	8341-6503	3	21.1	Φ1.6	
BNC-FKW5Y	8341-6504	5	26	Φ3.1	

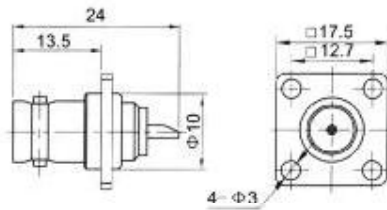

Type	part number	Note
BNC-FJF	8311-1901	

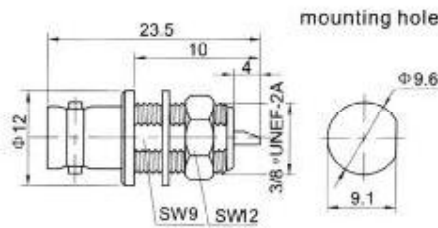


Type	part number	Note
BNC-FJY	8311-2901	

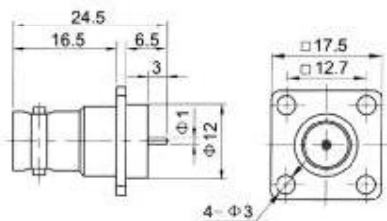

Type	part number	Note
BNC-FJD	8311-0001	


REVERSE POLARITY BNC

CERNEXWAVE




Type	part number	Note
------	-------------	------

BNC-FJJ	8301-6903	
---------	-----------	--

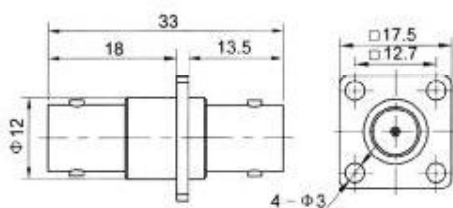


Type	part number	Note
------	-------------	------

BNC-FFJ	8301-1901	
---------	-----------	--



Type	part number	Note
------	-------------	------

BNC-FJK	8301-6902	
---------	-----------	--



Type	part number	Note
------	-------------	------

BNC-FKX	8301-6901	
---------	-----------	--