


MyTech Equivalent Amplifiers

FEATURES:

- ❖ Coverage From 0.1 to 40 GHz
- ❖ (Narrowband & Broadband)
- ❖ Noise Figure As Low As 0.5 dB
- ❖ Wide Dynamic Range
- ❖ Economically Priced

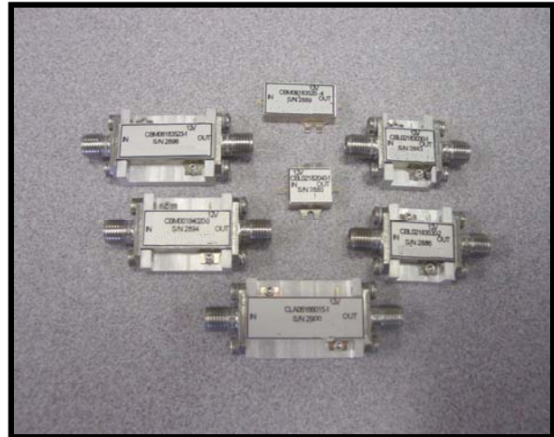

SPECIFICATIONS:

Amplifiers for Radar Application (Moderate Bandwidth)

Model Number	Frequency Range (GHz)	Gain (dB) Min.	SS Flatness (+/-dB) Max.	NF (dB) Max.	P1dB (dBm) Min.	VSWR In/Out Max.	Current @ 12-15 VDC (mA) Typ.	Case Type
CNL010138064M	1.2-1.4	38	0.50	0.6*	10	1.5:1	110	MSA6
CNL010138067M	1.4-1.7	38	0.50	0.6*	10	1.5:1	85	MSA6
CNL020236087M	2.4-2.7	36	0.50	0.8*	10	1.5:1	100	MSA6
CNL020236089M	2.7-2.9	36	0.50	0.8*	10	1.5:1	100	MSA6
CNL020336081M	2.9-3.1	36	0.50	0.8*	10	1.5:1	100	MSA6
CNL020334097M	2.9-3.7	34	0.50	0.9*	10	1.5:1	100	MSA6
CNL05062411M	5.2-6	24	0.75	1.1*	10	1.5:1	100	MSA4
CNL080932156M	8.5-9.6	32	0.75	1.5*	10	1.5:1	125	MSA4
CNL081126156M	8.5-11.6	26	0.75	1.5*	10	1.5:1	125	MSA4
CNL090928142M	9-9.2	28	0.75	1.4*	10	1.5:1	150	MSA4
CNL090928145M	9-9.5	28	0.75	1.4*	10	1.5:1	150	MSA4
CNL10102815M	10.5-10.7	28	0.75	1.5*	10	1.5:1	150	MSA4
CNL13142416M	13.2-14	24	0.75	1.6*	10	1.5:1	120	MSA4
CNL15152220M	15.4-15.7	22	0.50	2.0*	10	1.5:1	150	MSA4
CNL24251545M	24.2-25.3	15	1.00	4.5*	10	2.0:1	100	MSA4
CNL31331080M	31.8-33.4	10	1.50	8.0*	5	2.5:1	250	MSA6
CNL33361085M	33.4-36	10	1.50	8.5*	5	2.5:1	250	MSA6

* LOWER NOISE FIGURE ARE ALSO AVAILABLE. SEE OUR NARROW BAND LOW NOISE AMPLIFIERS DATA SHEET



MyTech Equivalent Amplifiers

Amplifiers for Communications Applications (Moderate Bandwidth)

Model Number	Frequency Range (GHz)	Gain (dB) Min.	SS Flatness (+/-dB) Max.	NF (dB) Max.	P1dB (dBm) Min.	VSWR In/Out Max.	Current @ 12-15 VDC (mA) Typ.	Case Type
CNLU90138072M	.9-1.2	38	0.50	0.7*	10	1.5:1	100	MSA4
CNLO10125086M	1.2-1.6	25	0.75	0.8*	5	1.5:1	80	MSA6
CNLO10138069M	1.7-1.9	38	0.50	0.6*	10	1.5:1	80	MSA6
CNLO10236082M	1.8-2.2	36	0.50	0.8*	10	1.5:1	100	MSA4
CNLO20236063M	2.2-2.3	36	0.50	0.6*	10	1.5:1	100	MSA6
CNLO20236087M	2.4-2.7	36	0.50	0.8*	10	1.5:1	100	MSA6
CNLO30434092M	3.4-4.2	34	0.50	0.9*	10	1.5:1	75	MSA4
CNLO30434082M	3.7-4.2	34	0.50	0.8*	10	1.5:1	75	MSA4
CNLO4053611M	4.4-5	36	0.50	1.1*	10	1.5:1	175	MSA4
CNLO50634124M	5.9-6.4	34	0.75	1.2*	10	1.5:1	175	MSA4
CNLO70734118M	7.2-7.8	34	0.75	1.1*	10	1.5:1	175	MSA4
CNLO70834134M	7.9-8.4	34	0.75	1.3*	10	1.5:1	175	MSA4
CNLO10112815M	10.7-11.7	28	0.75	1.5*	10	1.5:1	175	MSA4
CNLO10132420M	10.7-13.7	24	0.75	2.0*	10	1.5:1	150	MSA4
CNLO11122715M	11.7-12.2	27	0.75	1.5*	10	1.5:1	175	MSA4
CNLO12122716M	12.2-12.8	27	0.75	1.6*	10	1.5:1	175	MSA4
CNLO12132718M	12.7-13.3	27	0.75	1.8*	10	1.5:1	175	MSA4
CNLO14142419M	14-14.5	24	0.75	1.9*	10	1.5:1	150	MSA4
CNLO17201830M	17.7-20.2	18	0.75	3.0*	10	1.5:1	150	MSA4
CNLO20211833M	20.2-21.2	18	0.75	3.3*	8	1.5:1	150	MSA4
CNLO21241538M	21.2-24	15	1.00	3.8*	10	2.0:1	150	MSA4
CNLO25271250M	25.2-27.5	12	1.50	5.0*	8	2.0:1	210	MSA4
CNLO27301160M	27.5-30	11	1.50	6.0*	8	2.0:1	210	MSA4
CNLO30311065M	30-31	10	1.00	6.5*	8	2.5:1	210	MSA4
CNLO31311065M	31-31.2	10	1.00	6.5*	8	2.5:1	240	MSA5
CNLO36381085M	36-38.6	10	1.50	8.5*	5	2.5:1	260	MSA6
CNLO38401095M	38.6-40	10	1.50	9.5*	5	2.5:1	260	MSA6

* LOWER NOISE FIGURE ARE ALSO AVAILABLE. SEE OUR NARROW BAND LOW NOISE AMPLIFIER DATA SHEET



MyTech Equivalent Amplifiers

General Purpose Amplifiers

Model Number	Frequency Range (GHz)	Gain (dB) Min.	SS Flatness (+/-dB) Max.	NF (dB) Max.	P1dB (dBm) Min.	VSWR In/Out Max.	Current @ 12-15 VDC (mA) Typ.	Case Type
CNLU2U24010M	.2- .25	40	0.50	1.0*	10	2.0:1	190	MSA6
CNLU2U34009M	.25- .3	40	0.50	0.9*	10	2.0:1	190	MSA6
CNLU3U32808M	.3- .35	28	0.50	0.8*	10	2.0:1	80	MSA4
CNLU3042508M	.35- .4	25	0.50	0.8*	10	2.0:1	80	MSA4
CNLU4U42508M	.4- .45	25	0.50	0.8*	10	2.0:1	80	MSA4
CNLU4U52609M	.45- .55	26	0.50	0.9*	10	2.0:1	80	MSA4
CNLU5U72610M	.5- .7	26	0.50	1.0*	10	1.5:1	80	MSA4
CNLU7U92610M	.7- .9	26	0.50	1.0*	10	1.5:1	80	MSA4
CNLU8U92008M	.8- .9	20	0.25	0.8*	5	1.5:1	80	MSA4
CNLU90125101M	.9- 1.1	25	0.50	1.0*	10	1.5:1	80	MSA4
CNL010125103M	1.1- 1.3	25	0.50	1.0*	8	1.5:1	80	MSA4
CNL010125085M	1.3- 1.5	25	0.50	0.8*	8	1.5:1	80	MSA6
CNL010120076M	1.5- 1.6	20	0.25	0.7*	5	1.5:1	80	MSA4
CNL010128087M	1.5- 1.7	28	0.50	0.8*	10	1.5:1	80	MSA2
CNL01022008M	1.9- 2.0	20	0.25	0.8*	5	1.5:1	80	MSA4
CNL010236101M	1.9- 2.1	36	0.50	1.0*	10	1.5:1	150	MSA4
CNL020225083M	2.1- 2.3	25	0.50	0.8*	8	1.5:1	80	MSA6
CNL020225095M	2.3- 2.5	25	0.50	0.9*	8	1.5:1	80	MSA6
CNL020224097M	2.5- 2.7	24	0.50	0.9*	8	1.5:1	80	MSA6
CNL030335095M	3.1- 3.5	35	0.50	0.9*	10	1.5:1	150	MSA4
CNL050628115M	5.5- 6.5	28	0.75	1.1*	8	1.5:1	150	MSA4
CNL090924169M	9.4- 9.9	24	0.75	1.6*	10	1.5:1	150	MSA4
CNL09102616M	9.5- 10.5	26	0.75	1.6*	10	1.5:1	150	MSA4
CNL12131817M	12.5- 13	18	0.75	1.7*	10	1.5:1	150	MSA4
CNL13132418M	13- 13.5	24	0.75	1.8*	10	1.5:1	200	MSA4
CNL13141818M	13.5- 14	18	0.75	1.8*	10	1.5:1	150	MSA4
CNL14152219M	14- 15	22	0.75	1.9*	8	1.5:1	200	MSA4
CNL14152419M	14.5- 15	24	0.75	1.9*	10	1.5:1	200	MSA4
CNL15162421M	15- 16	24	0.75	2.1*	10	1.5:1	200	MSA4
CNL16172021M	16- 17	20	0.75	2.1*	10	1.5:1	200	MSA4
CNL17172022M	17- 17.5	20	0.75	2.2*	10	1.5:1	200	MSA4
CNL17182223M	17.5- 18	22	0.75	2.3*	10	1.5:1	200	MSA4
CNL18182025M	18- 18.5	20	0.75	2.5*	10	1.5:1	200	MSA4
CNL18191828M	18- 19	18	0.75	2.8*	10	1.5:1	200	MSA4
CNL18192026M	18.5- 19	20	0.75	2.6*	10	1.5:1	200	MSA4
CNL19192030M	19- 19.5	20	0.75	3.0*	10	1.5:1	200	MSA4



MyTech Equivalent Amplifiers

Model Number	Frequency Range (GHz)	Gain (dB) Min.	SS Flatness (+/-dB) Max.	NF (dB) Max.	P1dB (dBm) Min.	VSWR In/Out Max.	Current @ 12-15 VDC (mA) Typ.	Case Type
CNL19202233M	19-20	22	0.75	3.3*	8	1.5:1	200	MSA4
CNL19202032M	19.5-20	20	0.75	3.2*	10	1.5:1	200	MSA4
CNL20211835M	20-21	18	0.75	3.5*	10	1.5:1	200	MSA4
CNL20211834M	20.5-21	18	0.75	3.4*	10	1.5:1	200	MSA4
CNL21211837M	21-21.5	18	0.75	3.7*	10	2.0:1	200	MSA4
CNL21221838M	21-22	18	0.75	3.8*	10	2.0:1	200	MSA4
CNL21221620M	21.5-22	16	0.75	2.0*	10	2.0:1	200	MSA4
CNL22231638M	22-23	16	0.75	3.8*	10	2.0:1	200	MSA4
CNL23241639M	23-24	16	0.75	3.9*	10	2.0:1	200	MSA4
CNL24251440M	24-25	14	0.75	4.0*	10	2.0:1	200	MSA4
CNL25261445M	25-26	14	0.75	4.5*	10	2.0:1	200	MSA4
CNL27301160M	27-30	11	1.50	6.0*	8	2.0:1	210	MSA4
CNL30331065M	30-33	10	1.50	6.5*	8	2.0:1	210	MSA4
CNL33361075M	33-36	10	1.50	7.5*	8	2.5:1	240	MSA5
CNL36381085M	36-38	10	1.50	8.5*	5	2.5:1	260	MSA6
CNL38401095M	38-40	10	1.50	9.5*	5	2.5:1	260	MSA6

* LOWER NOISE FIGURE ARE ALSO AVAILABLE. SEE OUR NARROW BAND LOW NOISE AMPLIFIERS DATA SHEET

Octave

Model Number	Frequency Range (GHz)	Gain (dB) Min.	SS Flatness (+/-dB) Max.	NF (dB) Max.	P1dB (dBm) Min.	VSWR In/Out Max.	Current @ 12-15 VDC (mA) Typ.	Case Type
CBLU1U23611M	.12-.25	36	1.00	1.1	10	2.0:1	120	MSA6
CBLU2053610M	.25-5	36	1.00	1.0	10	2.0:1	120	MSA6
CBLU5012408M	.5-1	24	1.00	0.8	10	2.0:1	100	MSA6
CBL01023407M	1-2	34	1.00	0.7	10	2.0:1	130	MSA6
CBL010223104M	1.2-2.4	23	1.00	1.0	8	2.0:1	100	MSA2
CBL02042810M	2-4	28	1.00	1.0	10	2.0:1	125	MSA6
CBL020532152M	2.6-5.2	32	1.25	1.5	10	2.0:1	150	MSA4
CBL04083412M	4-8	34	1.00	1.2	10	2.0:1	175	MSA4
CBL05102718M	5-10	27	1.25	1.8	10	2.0:1	150	MSA4
CBL06122219M	6-12	22	1.00	1.9	10	2.0:1	175	MSA4
CBL08123015M	8-12	30	1.25	1.5	10	2.0:1	150	MSA4
CBL12182420M	12-18	24	1.50	2.0	10	2.0:1	120	MSA4



MyTech Equivalent Amplifiers

Multioctave

Model Number	Frequency Range (GHz)	Gain (dB) Min.	SS Flatness (+/-dB) Max.	NF (dB) Max.	P1dB (dBm) Min.	VSWR In/Out Max.	Current @ 12-15 VDC (mA) Typ.	Case Type
CBLU30125104M	.3-1.4	25	1.00	1.0	10	2.0:1	100	MSA4
CBLU5023610M	.5-2	36	1.00	1.0	10	2.0:1	130	MSA8
CBL01032811M	1-3	28	1.50	1.1	8	2.5:1	150	MSA8
CBL01042613M	1-4	26	1.75	1.3	8	2.5:1	175	MSA8
CBL02062616M	2-6	26	1.00	1.6	10	2.0:1	125	MSA4
CBL02083020M	2-8	30	1.50	2.0	10	2.0:1	175	MSA4
CBL02182035M	2-18	20	2.50	3.5	10	2.5:1	100	MSA4
CBL04122225M	4-12	22	1.00	2.5	10	2.0:1	175	MSA4
CBL06182030M	6-18	20	2.00	3.0	10	2.5:1	175	MSA4
CBL08182028M	8-18	20	1.50	2.8	10	2.0:1	150	MSA4

Low-Noise Ultra Wideband Amplifiers

Model Number	Frequency Range (GHz)	Gain (dB) Min.	SS Flatness (+/-dB) Max.	NF (dB) Max.	P1dB (dBm) Min.	VSWR In/Out Max.	Current @ 12-15 VDC (mA) Typ.	Case Type
CBLU1011313M	.1-1	13	1.00	1.3*	10	2.5:1	85	MSA4
CBLU1023612M	.1-2	36	1.00	1.2*	10	2.0:1	150	MSA4
CBLU1023810M	.1-2	38	1.00	1.0**	15	2.0:1	15V@150	MSA8
CBLU1032825M	.1-3	28	1.50	2.5**	23	2.0:1	15V@275	HN4
CBLU1033213M	.1-3	32	1.00	1.3*	10	2.0:1	150	MSA4
CBLU1042615M	.1-4	26	1.25	1.5*	10	2.0:1	150	MSA4
CBLU1063020M	.1-6	30	1.50	2.0*	10	2.0:1	175	MSA4
CBLU1083025M	.1-8	30	1.50	2.5*	10	2.0:1	175	MSA4
CBLU1102830M Δ	.1-10	28	1.50	3.0*	10	2.0:1	175	MSA4
CBLU1122635M Δ	.1-12	26	1.50	3.5*	10	2.0:1	175	MSA4
CBLU1142240M Δ	.1-14	22	2.00	4.0*	10	2.5:1	200	MSA4
CBLU1162142M Δ	.1-16	21	2.00	4.2*	10	2.5:1	200	MSA4
CBLU1181843M Δ	.1-18	18	2.00	4.3*	10	2.5:1	200	MSA4
CBLU1201845M Δ	.1-20	18	2.50	4.5*	10	2.5:1	175	MSA4
CBLU1221455M Δ	.1-22	14	2.50	5.5*	10	2.5:1	175	MSA4
CBLU1241265M Δ	.1-24	12	2.50	6.5*	10	2.5:1	175	MSA4
CBLU1261090MΔ	.1-26.5	10	2.50	9.0*	10	2.5:1	175	MSA4
CBLU1280995M Δ	.1-28	9	2.50	9.5*	10	2.7:1	175	MSA4
CBLU1300810M Δ	.1-30	8	2.50	10.0*	7	3.0:1	175	MSA4
CBLU1400812M Δ	.1-40	8	4.00	12.0*	6	3.5:1	275	MSA8
CBLU2022418M	.2-2	24	1.00	1.8**	27	2.0:1	15V@250	HN4
CBL02182445M	2-18	24	1.50	4.5	23	2.0:1	15V@650	HN4



MyTech Equivalent Amplifiers

* NOISE FIGURE INCREASES BELOW 500 MHz

** NOISE FIGURE (0.5-2GHz)

Δ LOWER NOISE FIGURE IS ALSO AVAILABLE. SEE OUR BROADBAND LOW NOISE AMPLIFIERS DATA SHEET

Medium Power Amplifiers

Model Number	Frequency Range (GHZ)	Gain (dB) Min.	SS Flatness (+/-dB) Max.	NF (dB) Max.	P1dB (dBm) Min.	VSWR In/Out Max.	Current @ 12-15 VDC (mA) Typ.	Case Type
CBMU1011423M	.1-1	14	1.00	3.5	23	2.5:1	180	MSA4
CBMU10110205M	.1-1.5	10	1.50	1.8	20	2.0:1	180	MSA4
CBMU1023327M	.1-2	33	1.00	2.5	27	2.0:1	275	MSA6
CBMU1032523M	.1-3	25	1.50	4.0	23	2.5:1	275	MSA6
CBMU1042323M	.1-4	23	1.50	4.5	23	2.5:1	275	MSA6
CBMU1062223M	.1-6	22	1.50	6.0	23	2.5:1	275	MSA4
CBMU1082122M	.1-8	21	1.50	6.5	22	2.5:1	275	MSA4
CBMU1101820M	.1-10	18	1.75	7.0	20	2.5:1	295	MSA4
CBMU1122420M	.1-12	24	2.50	7.5	20	2.5:1	275	MSA4
CBMU1181820M	.1-18	18	3.00	8.5	20	2.7:1	400	MSA4
CBMU40316205M	.4-3.5	16	1.50	4.0	20	2.0:1	185	MSA4
CBM01022020M	1-2	20	1.00	3.0	20	2.0:1	190	MSA4
CBM02042625M	2-4	26	1.00	4.0	25	2.0:1	275	MSA4
CBM02082623M	2-8	26	1.50	6.0	23	2.0:1	295	MSA4
CBM02182018M	2-18	20	2.00	5.0	18	2.5:1	295	MSA4
CBM04082823M	4-8	28	1.00	4.0	23	2.0:1	295	MSA4
CBM06121822M	6-12	18	1.50	6.0	22	2.0:1	275	MSA4
CBM06182420M	6-18	24	3.00	6.0	20	2.0:1	375	MSA4
CBM08122423M	8-12	24	1.50	4.0	23	2.0:1	285	MSA4
CBM08182621M	8-18	26	1.75	6.0	21	2.0:1	325	MSA4
CBM18262015M	18-26.5	20	3.00	8.0	15	2.5:1	385	MSA4