


SERIES BNC REVERSE POLARITY RF COAXIAL CONNECTORS

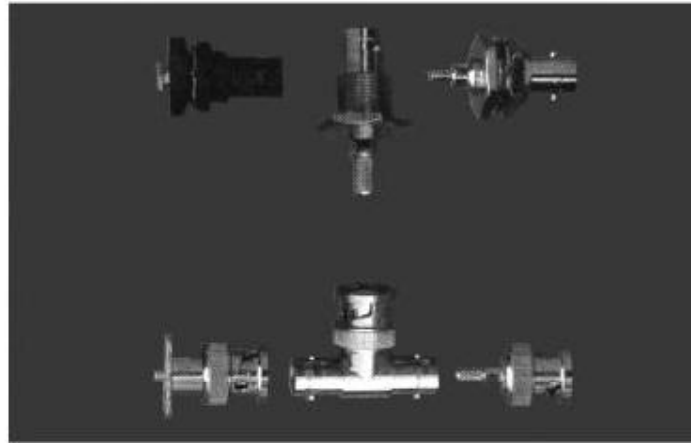


Series BNC inversion of jack and plug RF connectors used in some occasions, such as has strictly differentiated input and output entrance and has special used entrance.

Key performance

Characteristic Impedance : 50 Ω
 Frequency range : 0~4GHz
 Contact resistance :
 Center conductor ≤ 2.0m Ω
 Out conductor ≤ 0.2m Ω
 Insulation resistance : ≥ 5000M Ω
 Insulator voltage withstanding : 1500V
 VSWR : ≤ 1.30
 Connector durability : 500 cycles
Applicable spec/std : MIL-C-39012


Material

Center contacts:
 Male---brass, gold plated.
 Female---phosphor bronze, gold plated
 Bodies and other metal parts:
 brass, nickel plated
 Insulators: Teflon
 Crimp ferrule: copper, nickel plated.
 Gasket and seal rings: silicone rubber
 Heat-shrink tubing: thermofit plastic.

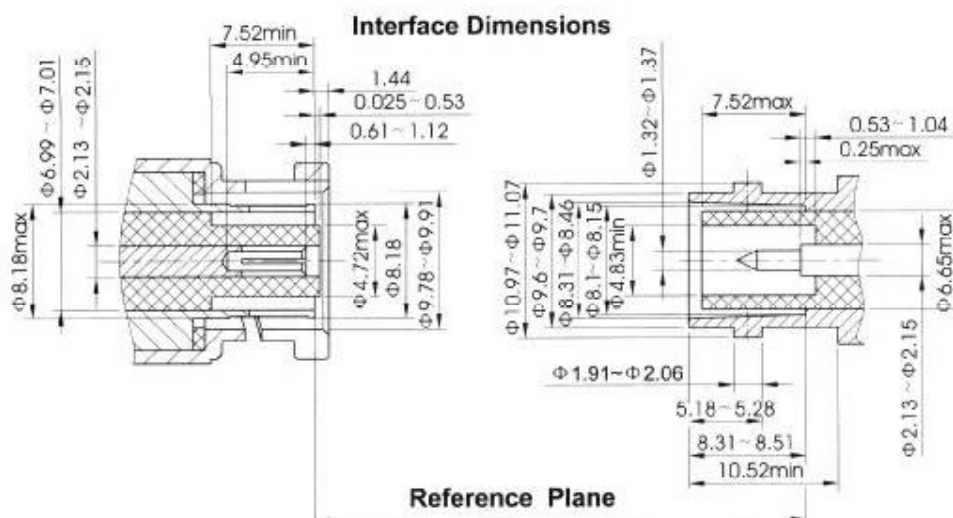


REVERSE POLARITY BNC


CERNEXWAVE




Type	part number	suitable cable	L	D	Note
BNC-FK3Y	8321-6503	3	27	Φ1.6	
BNC-FK5Y	8321-6504	5	27.8	Φ3.1	




Type	part number	suitable cable	L	D	Note
BNC-FKW3Y	8341-6503	3	21.1	Φ1.6	
BNC-FKW5Y	8341-6504	5	26	Φ3.1	

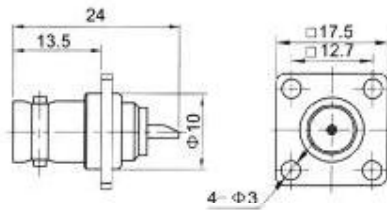

Type	part number	Note
BNC-FJF	8311-1901	

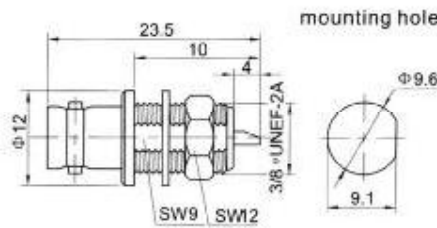


Type	part number	Note
BNC-FJY	8311-2901	

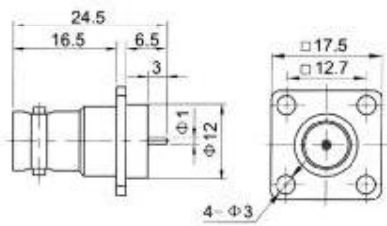

Type	part number	Note
BNC-FJD	8311-0001	


REVERSE POLARITY BNC

CERNEXWAVE




Type	part number	Note
------	-------------	------

BNC-FJJ	8301-6903	
---------	-----------	--

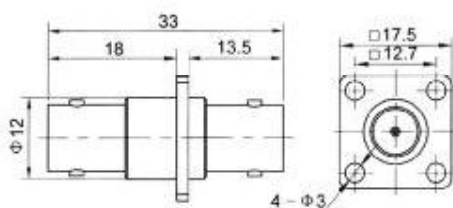


Type	part number	Note
------	-------------	------

BNC-FFJ	8301-1901	
---------	-----------	--



Type	part number	Note
------	-------------	------

BNC-FJK	8301-6902	
---------	-----------	--



Type	part number	Note
------	-------------	------

BNC-FKX	8301-6901	
---------	-----------	--